

# T E S T C E R T I F I C A T E

**CT-18-06-28-01**

**Product:** Type: Plywood  
Characterisation: Beech plywood  
Date production: 22 May 2018  
Class of gluing: 1 – interior use

**Company:** DYAS.EU, a.s.  
Veselská 384  
687 24 Uherský Ostroh; Czech rep.

**Order:** Determination of the formaldehyde release following secondary test chamber method ASTM D6007-14


**Test method:** Test chamber method ASTM D6007-14  
Chemical analysis: Acetylacetone - method  
Limit of detection (LOD): 0.01 ppm

**Test report:** Test report 2518286 dated 15 June 2018


**Test result:** The formaldehyde release of the tested product is 0.04 ppm.

The tested sample meets the limit value for plywood (0.05 ppm) according to the requirements of EPA TSCA Title VI - 40 CFR Part 770 - Formaldehyde Standards for Composite Wood Products - § 770.10 (b)(1)-(4) "Formaldehyde emission standards" and CARB Phase 2 - Final Regulation Order of "ATCM to Reduce Formaldehyde Emission from Composite Wood Products" - §93120 - 93120.12, title 17, California Code of Regulations, § 93120.2 (a) "Formaldehyde Emission Standards for Hardwood Plywood (HWPW), particleboard (PB), and Medium Density Fiberboard (MDF)".

Dresden, 28 June 2018

  
Head of laboratory

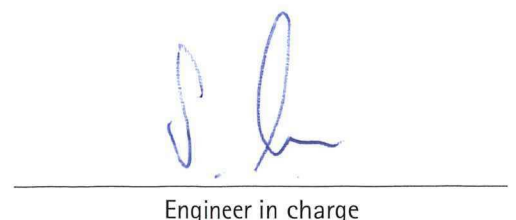

  
Engineer in charge